


Neoprene Rubber Washer 1-3/4" OD x 7/16" ID x 1/4" Thick

Flat die-cut washer · Polychloroprene (CR) · 60-70 Shore A · -40°F to 212°F

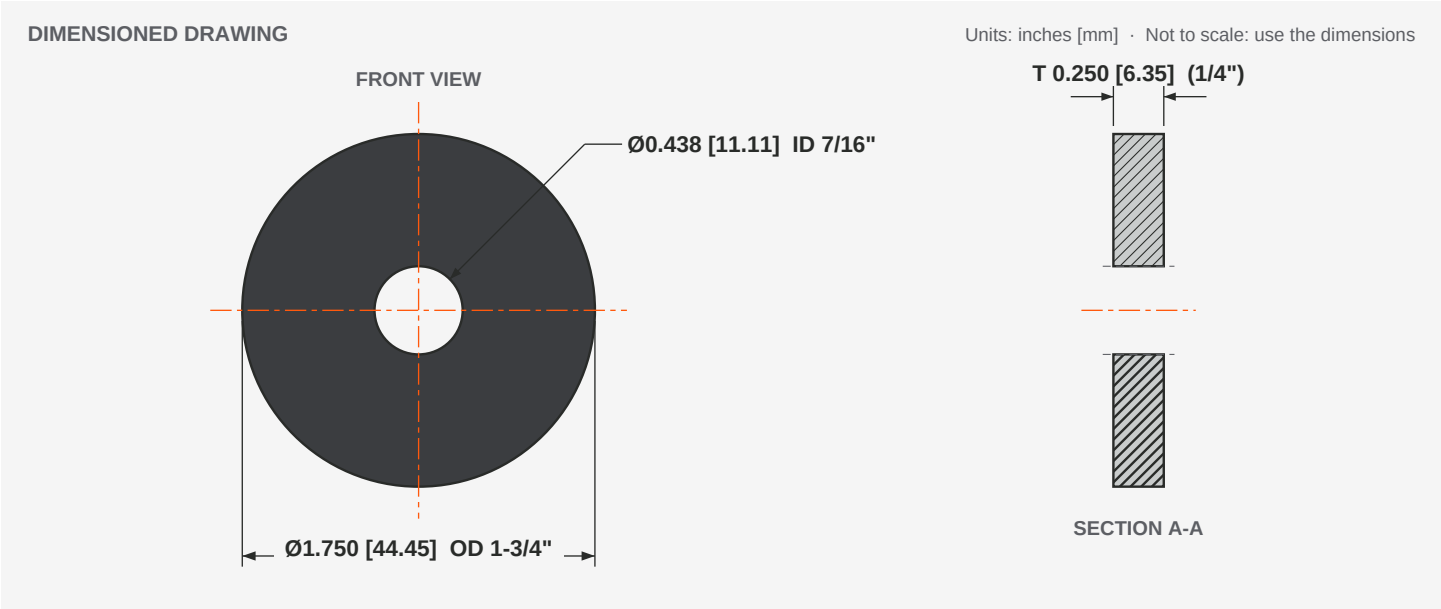

DIMENSIONS

Feature	Nominal	Decimal	Metric	Tolerance (typical)
Outside diameter (OD)	1-3/4"	1.750"	44.45 mm	±0.015" (±0.38 mm)
Inside diameter (ID)	7/16"	0.438"	11.11 mm	±0.015" (±0.38 mm)
Thickness (T)	1/4"	0.250"	6.35 mm	±0.015" or ±10%, whichever is greater

MATERIAL: NEOPRENE

Polymer	Polychloroprene (CR)
Hardness	60-70 Shore A (typical)
Service temp.	-40°F to 212°F (-40°C to 100°C)
Colour	Black
Reference	ASTM D2000 type BC/BE

Balanced all-rounder: moderate oil resistance, good weathering, self-extinguishing (flame resistant).

CHEMICAL RESISTANCE (typical)

Media	Rating
Water	■ Good
Steam / hot water	■ Poor
Petroleum oil & grease	■ Fair
Gasoline / diesel	■ Poor
Ozone, UV & weather	■ Good
Dilute acids	■ Good
Dilute alkalis	■ Good
Ketones (MEK, acetone)	■ Poor

AVOID

Strong oxidizing acids, ketones, esters and aromatic solvents.

TYPICAL USES

- General-purpose sealing and spacing
- HVAC and refrigeration hardware
- Marine fittings
- Outdoor plumbing

Order, bulk price tiers & CAD

Product page	Buy this washer (price tiers apply at 50+ pcs)
CAD (2D DXF)	dixonappstudio.com/specs/rww/RWSHRNP13471614.dxf
CAD (3D STEP)	dixonappstudio.com/specs/rww/RWSHRNP13471614.step
Material guide	rubberwasherwarehouse.com/pages/neoprene-rubber-washers-guide



Scan to order

TYPICAL VALUES, VERIFY FOR YOUR APPLICATION. Properties are typical for commercial-grade material and are not a specification or warranty; actual values vary by compound, grade, temperature, pressure and exposure time. Test parts in your application before production use. Food-contact, potable-water, flame or electrical ratings apply only when a certified grade is confirmed on your order.
Typical ranges compiled from ASTM D2000 material classes, the Parker O-Ring Handbook (ORD 5700) compatibility tables and Rubber Washer Warehouse material pages.